

Features

- Ultra High Efficiency (Up to 92.5%)
- Active Power Factor Correction (0.99 Typical)
- Constant Current Output
- Lightning Protection
- All-Round Protection: SCP, OTP, OVP
- Waterproof (IP67)
- Comply With UL8750 & EN61347 Safety Regulations



Description

The EUC-150SxxxST Series operate from a 90 ~ 305 Vac input range. They are designed to be highly efficient and highly reliable. The standard features include lightning protection, over voltage protection, short circuit protection, and over temperature protection.

Models

Output Current	Input Voltage Range	Output Voltage Range	Max. Output Power	Typical Efficiency (1)	Power Factor		Model Number (2)
					110Vac	220Vac	
350 mA	90 ~ 305 Vac	256~428Vdc	150 W	92.5%	0.99	0.96	EUC-150S035ST
450 mA	90 ~ 305 Vac	200~333Vdc	150 W	92.5%	0.99	0.96	EUC-150S045ST
700 mA	90 ~ 305 Vac	128~214Vdc	150 W	92.5%	0.99	0.96	EUC-150S070ST★
1050 mA	90 ~ 305 Vac	85~142 Vdc	150 W	92.0%	0.99	0.96	EUC-150S105ST★
1400 mA	90 ~ 305 Vac	64~107 Vdc	150 W	92.0%	0.99	0.96	EUC-150S140ST
1750 mA	90 ~ 305 Vac	51~85 Vdc	150 W	91.5%	0.99	0.96	EUC-150S175ST
2100 mA	90 ~ 305 Vac	42~71 Vdc	150 W	91.0%	0.99	0.96	EUC-150S210ST
2450 mA	90 ~ 305 Vac	36~61 Vdc	150 W	90.0%	0.99	0.96	EUC-150S245ST★
2800 mA	90 ~ 305 Vac	31~53 Vdc	150 W	90.0%	0.99	0.96	EUC-150S280ST
3150 mA	90 ~ 305 Vac	28~47 Vdc	150 W	90.0%	0.99	0.96	EUC-150S315ST
3500 mA	90 ~ 305 Vac	25~42 Vdc	150 W	90.0%	0.99	0.96	EUC-150S350ST★
4200 mA	90 ~ 305 Vac	21~35 Vdc	150 W	89.5%	0.99	0.96	EUC-150S420ST
4900 mA	90 ~ 305 Vac	18~30 Vdc	150 W	89.5%	0.99	0.96	EUC-150S490ST
5950 mA	90 ~ 305 Vac	15~25 Vdc	150 W	88.0%	0.99	0.96	EUC-150S595ST

- Notes:**
- (1) Measured at full load and 220 Vac input.
 - (2) A suffix -xxx may be added to denote variations or modifications to the base product, where x can be any alphanumeric character or blank.
 - (3) ★: Popular model.

Specifications are subject to changes without notice.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 V	-	305 V	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	1 mA	At 277Vac 60Hz input
Input AC Current	-	-	1.8 A	Measured at full load and 100 Vac input.
	-	-	0.9 A	Measured at full load and 220 Vac input.
Inrush Current	-	-	65 A	At 230Vac input 25°C Cold Start

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Range				
$I_o = 350$ mA	332 mA	350 mA	368 mA	
$I_o = 450$ mA	427 mA	450 mA	473 mA	
$I_o = 700$ mA	665 mA	700 mA	735 mA	
$I_o = 1050$ mA	997 mA	1050 mA	1103 mA	
$I_o = 1400$ mA	1330 mA	1400 mA	1470 mA	
$I_o = 1750$ mA	1662 mA	1750 mA	1838 mA	
$I_o = 2100$ mA	1995 mA	2100 mA	2205 mA	
$I_o = 2450$ mA	2327 mA	2450 mA	2573 mA	
$I_o = 2800$ mA	2660 mA	2800 mA	2940 mA	
$I_o = 3150$ mA	2992 mA	3150 mA	3308 mA	
$I_o = 3500$ mA	3325 mA	3500 mA	3675 mA	
$I_o = 4200$ mA	3990 mA	4200 mA	4410 mA	
$I_o = 4900$ mA	4655 mA	4900 mA	5145 mA	
$I_o = 5950$ mA	5652 mA	5950 mA	6248 mA	
Ripple and Noise (pk-pk)	-	-	3% V_o	Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor.
Line Regulation	-	-	1%	
Load Regulation	-	-	3%	
Turn-on Delay Time	-	0.5 s	1.0 s	Measured at 110Vac input.
	-	0.3 s	0.6 s	Measured at 220Vac input.

Note: All specifications are typical at 25 °C unless otherwise stated.

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection				Latch mode. The power supply shall return to normal operation only after the power is turn-on again.
$I_o = 350 \text{ mA}$	514 V	578 V	642 V	
$I_o = 450 \text{ mA}$	400 V	450 V	500 V	
$I_o = 700 \text{ mA}$	257 V	289 V	321 V	
$I_o = 1050 \text{ mA}$	170 V	192 V	213 V	
$I_o = 1400 \text{ mA}$	128 V	144 V	161 V	
$I_o = 1750 \text{ mA}$	102 V	115 V	128 V	
$I_o = 2100 \text{ mA}$	85 V	96 V	107 V	
$I_o = 2450 \text{ mA}$	73 V	82 V	92 V	
$I_o = 2800 \text{ mA}$	64 V	72 V	80 V	
$I_o = 3150 \text{ mA}$	56 V	63 V	71 V	
$I_o = 3500 \text{ mA}$	50 V	57 V	63 V	
$I_o = 4200 \text{ mA}$	42 V	47 V	53 V	
$I_o = 4900 \text{ mA}$	36 V	41 V	45 V	
$I_o = 5950 \text{ mA}$	30 V	34 V	38 V	
Over Temperature Protection	-	110 °C	-	Maximum temperature of components inside the case.
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency				Measured at full load, 110Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
$I_o = 350 \text{ mA}$	89.5%	90.5%	-	
$I_o = 450 \text{ mA}$	89.5%	90.5%	-	
$I_o = 700 \text{ mA}$	89.5%	90.5%	-	
$I_o = 1050 \text{ mA}$	89.0%	90.0%	-	
$I_o = 1400 \text{ mA}$	89.0%	90.0%	-	
$I_o = 1750 \text{ mA}$	88.5%	89.5%	-	
$I_o = 2100 \text{ mA}$	88.0%	89.0%	-	
$I_o = 2450 \text{ mA}$	87.0%	88.0%	-	
$I_o = 2800 \text{ mA}$	87.0%	88.0%	-	
$I_o = 3150 \text{ mA}$	87.0%	88.0%	-	
$I_o = 3500 \text{ mA}$	87.0%	88.0%	-	
$I_o = 4200 \text{ mA}$	86.5%	87.5%	-	
$I_o = 4900 \text{ mA}$	86.5%	87.5%	-	
$I_o = 5950 \text{ mA}$	85.0%	86.0%	-	
Efficiency				Measured at full load, 220Vac input, 25°C ambient temperature, after the unit is thermally stabilized.
$I_o = 350 \text{ mA}$	91.5%	92.5%	-	
$I_o = 450 \text{ mA}$	91.5%	92.5%	-	
$I_o = 700 \text{ mA}$	91.5%	92.5%	-	
$I_o = 1050 \text{ mA}$	91.0%	92.0%	-	
$I_o = 1400 \text{ mA}$	91.0%	92.0%	-	
$I_o = 1750 \text{ mA}$	90.5%	91.5%	-	
$I_o = 2100 \text{ mA}$	90.0%	91.0%	-	
$I_o = 2450 \text{ mA}$	89.0%	90.0%	-	
$I_o = 2800 \text{ mA}$	89.0%	90.0%	-	
$I_o = 3150 \text{ mA}$	89.0%	90.0%	-	
$I_o = 3500 \text{ mA}$	89.0%	90.0%	-	
$I_o = 4200 \text{ mA}$	88.5%	89.5%	-	
$I_o = 4900 \text{ mA}$	88.5%	89.5%	-	
$I_o = 5950 \text{ mA}$	87.0%	88.0%	-	

Specifications are subject to changes without notice.

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
MTBF I _o = 5950 mA I _o = 350 mA		195,000 Hours 250,000 Hours		Measured at 110Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Life Time I _o = 5950 mA I _o = 350 mA		50,000 Hours 90,000 Hours		Measured at 220Vac input, 80%load; Case temperature=60°C @ Tc point. See the life vs. Tc curve for the details
Dimensions Inches (L × W × H) Millimeters (L × W × H)		9.37 × 3.13 × 1.81 238 × 79.5 × 46		
Net Weight	-	1500 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.

Environmental Specifications



Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-35 °C	-	+70 °C	Humidity: 10% RH to 100% RH; See Derating Curve for more details
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH

Safety & EMC Compliance



Safety Category	Standard
CUL	UL8750 Compliance to UL1012 UL935, CAN/CSA-C22.2 No. 0, CSA-C22.2 No. 107.1, CSA-C22.2 No. 250.0
CE	EN 61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Specifications are subject to changes without notice.

Derating Curve

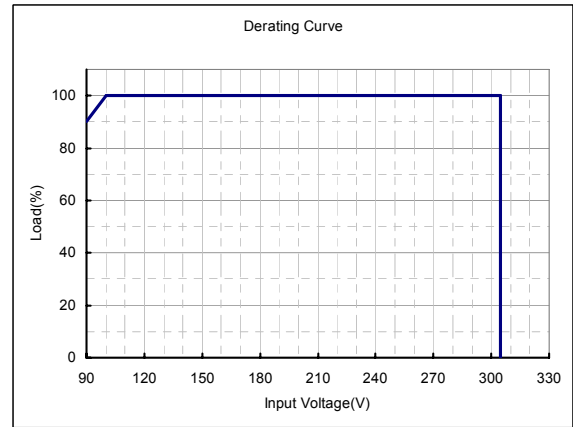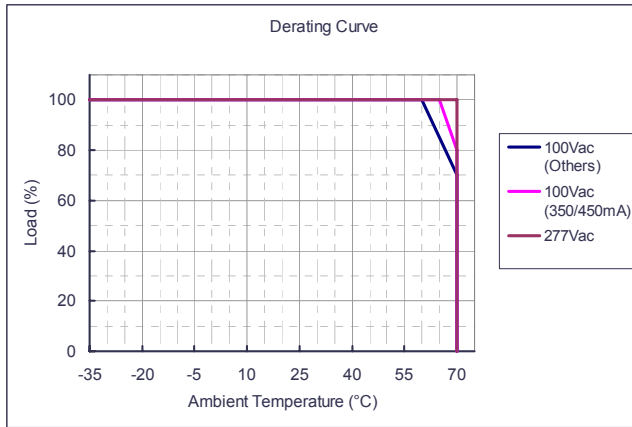


Life Time vs. Case Temperature Curve

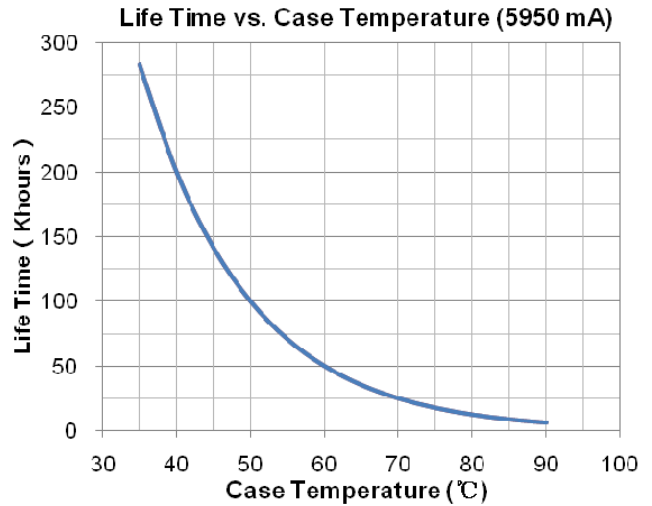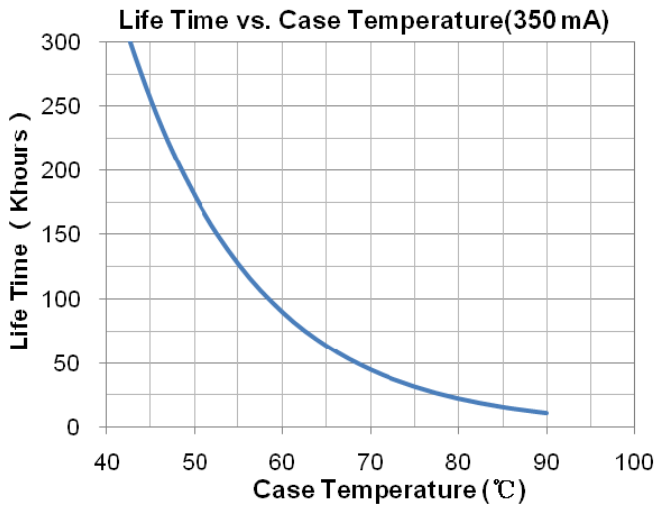

Specifications are subject to changes without notice.

Mechanical Outline

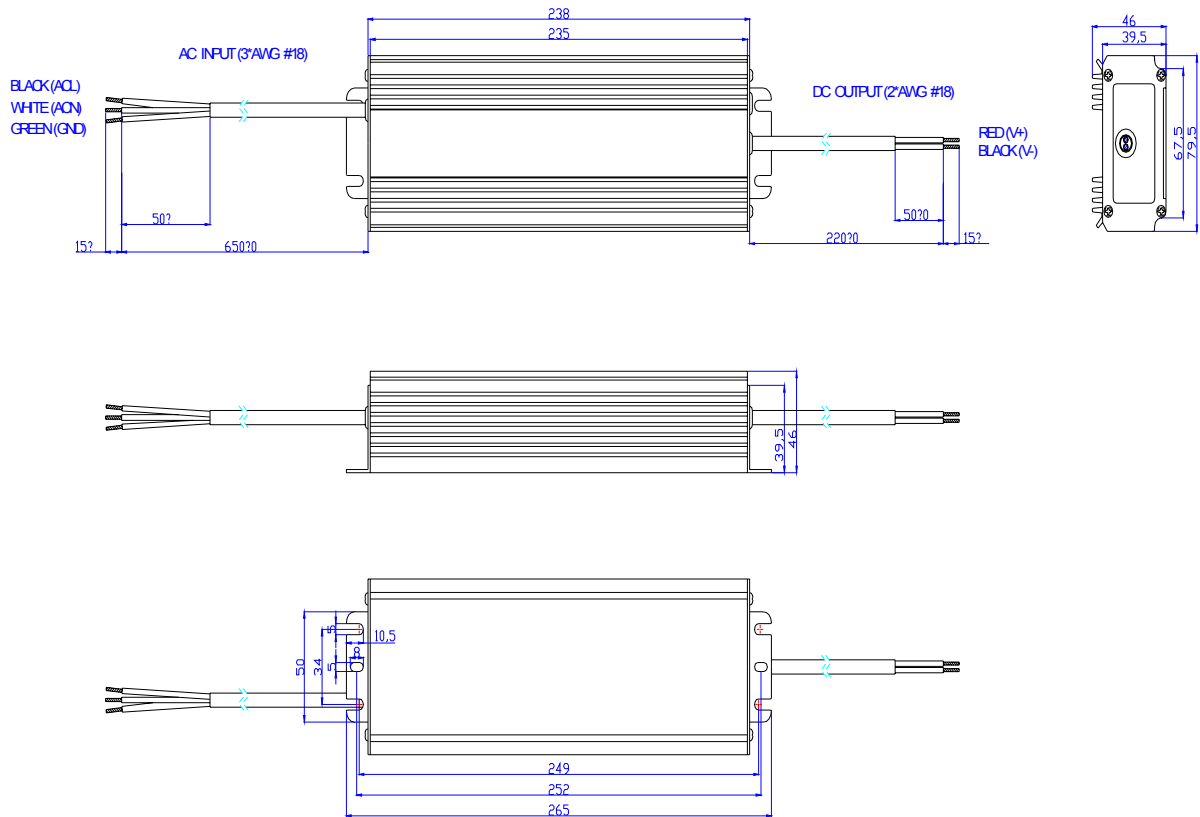

RoHS Compliance

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Specifications are subject to changes without notice.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2009-09-02	V3.3	Change MTBF and Life Time		
2009-09-11	V3.4	Change Turn-on Delay Time		
2009-10-15	V3.5	Delete "UL1310 Class2" in Safety & EMC Compliance		
2009-11-10	V4.0	Change notes of efficiency.		
2009-12-04	V4.1	Add two models of 350mA & 450mA. Update Mechanical Outline.		
2010-01-15	A	Change the derating curve		
2010-05-31	B	Add star rank for recommended models	/	☆: Popular model.
		Add Leakage Current in Input Specifications	/	Max. 1 mA At 277Vac 50Hz input
		Standardize the tolerance in Mechanical Outline	/	/
2010-07-22	C	Delete Output Overshoot / Undershoot	Max. 10%	/
2011-01-14	D	Change popular models	/	/
		Update MTBF & Life Time Date	For One Model	For Two Models
2011-04-29	E	Change the Turn-on Delay Time 110 Vac 220 Vac	Typ. Max. 1.0S 2.0S 1.0S 2.0S	Typ. Max. 0.5S 1.0S 0.3S 0.6S
2012-01-13	F	Mechanical outline	/	Position of output wires changed
2012-06-15	G	Life time curve	/	Added
		Efficiency	/	Changed about ±5%
		Mechanical outline	/	Updated
2012-7-4	H	EN61000-4-5	line to line 2 kV, line to earth 4 kV	line to line 4 kV, line to earth 6 kV
		Life time/MTBF	/	Updated

Specifications are subject to changes without notice.